

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. § 371

09/581765

U.S. APPLICATION NO. (If known, see 37 C.F.R. § 1.5) To be assigned

INTERNATIONAL APPLICATION NO. PCT/GB98/03816	INTERNATIONAL FILING DATE December 17, 1998	PRIORITY DATE CLAIMED December 17, 1997
---	--	--

TITLE OF INVENTION: A VACUUM CLEANER

APPLICANT(S) FOR DO/EO/US: James DYSON, Wiltshire, GREAT BRITAIN

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. § 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. § 371.
3. ☐ This express request to begin national examination procedures (35 U.S.C. § 371(f)) at any time rather than until the expiration of the applicable time limit set in 35 U.S.C. § 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. § 371(c)(2))
  - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☐ A translation of the International Application into English (35 U.S.C. § 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. § 371(c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. § 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. § 371(c)(4)).
10. ☒ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. § 371(c)(5)).


Items 11. to 16. below concern document(s) or information included:


11. ☐ An Information Disclosure Statement under 37 C.F.R. §§ 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 C.F.R. §§ 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.  
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information: International Preliminary Examination Report; return receipt postcard.

CERTIFICATE OF HAND DELIVERY

I hereby certify that this correspondence is being hand filed with the United States Patent and Trademark Office in Washington, D.C. on June 16, 2000.

*Elizabeth K. Stenson*  
Elizabeth K. Stenson




U.S. APPLICATION NO. <b>09/581765</b> (If known, see 37 C.F.R. § 1.53) To be assigned		INTERNATIONAL APPLICATION NO. PCT/GB98/03816		DOCKET NUMBER. 424662001700	
17.* <input checked="" type="checkbox"/> The following fees are submitted: <b>BASIC NATIONAL FEE (37 C.F.R. §§ 1.492(a)(1)-(5)):</b> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO.....\$840.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO.....\$670.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO by international search fee (37 CFR 1.445(a)(2)) paid to USPTO.....\$690.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provision of PCT Article 33(1)-(4) .....\$970.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4)..... \$96.00				CALCULATIONS PTO USE ONLY	
<b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				\$840.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 C.F.R. § 1.492(e)).				\$*	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$*	
Total claims	21 - 20 =	1	x \$18.00	\$18.00	
Independent claims	2 - 3 =	0	x \$78.00	\$*	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$260.00	\$*	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$858.00	
Reduction by ½ for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 C.F.R. §§ 1.9, 1.27, 1.28)				\$*	
<b>SUBTOTAL =</b>				\$858.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 C.F.R. § 1.492(f)).				+	\$*
<b>TOTAL NATIONAL FEE =</b>				\$858.00	
Fee for recording the enclosed assignment (37 C.F.R. § 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 C.F.R. §§ 3.28, 3.31). \$40.00 per property				+	\$*
<b>TOTAL FEES ENCLOSED =</b>				\$858.00	
				<b>Amount to be refunded:</b>	\$*
				<b>Charged:</b>	\$*
a. <input checked="" type="checkbox"/> A check in the amount of \$858.00 to cover the above fees is enclosed. b. <input checked="" type="checkbox"/> The Assistant Commissioner is hereby authorized to charge any additional fees that may be required, or credit any overpayment to <b>Deposit Account No. 03-1952</b> .					
<b>NOTE: Where an appropriate time limit under 37 C.F.R. § 1.494 or 1.495 has not been met, a petition to revive (37 C.F.R. § 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</b>					
SEND ALL CORRESPONDENCE TO:					
Richard D. Jordan Morrison & Foerster LLP 2000 Pennsylvania Avenue, N.W. Washington, D.C. 20006-1888			 SIGNATURE Richard D. Jordan Registration No. 33,519		

PATENT  
Docket No. 424662001700

**CERTIFICATE OF HAND DELIVERY**

I hereby certify that this correspondence is being hand filed with the United States Patent and Trademark Office in Washington, D.C. on  
June 16, 2000.

  
Elizabeth K. Stenson

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In the application of:

James DYSON

Serial No.: To be assigned

Filing Date: June 16, 2000

For: A VACUUM CLEANER

Examiner: To be assigned

Group Art Unit: To be assigned

**PRELIMINARY AMENDMENT**

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

Prior to examination on the merits, please amend this application as follows:

**IN THE SPECIFICATION**

Please amend the specification as follows:

Page 1, between lines 1 and 2, insert --Field of the Invention--.

Page 1, between lines 2 and 3, insert --Background of the Invention--.

Page 2, between lines 15 and 16, insert --Summary of the Invention--.

Page 2, lines 16-17, change “The invention provides a vacuum cleaner as claimed in claim 1. Utilising cylindrical filters exposes a significantly...” to --The invention provides a vacuum cleaner which utilizes cylindrical filters that expose a significantly...--.

Page 2, lines 22-23, change “The invention also provides a vacuum cleaner as claimed in claim 8. The diffusion of the air as it exits the outlet reduces the intensity...” to --The invention also provides a vacuum cleaner which diffuses air as it exits the outlet. This diffusion reduces the intensity...--.

Page 2, between lines 24 and 25, insert --Brief Description of the Drawings--.

Page 3, between lines 8 and 9, insert --Detailed Description of the Invention--.

#### IN THE ABSTRACT

Following the claims, please insert the attached Abstract in its entirety.

## IN THE CLAIMS

Please cancel claim 17.

Please amend the claims as follows:

1. (Amended) A vacuum cleaner comprising [an airflow path having] a dirty air inlet and a clean air outlet, a fan for drawing an airflow along [the] an airflow path from the dirty air inlet to the clean air outlet, a motor for driving the fan, separating apparatus for separating dirt and dust from the airflow, a pre-motor filter arranged upstream of the motor and a post-motor filter arranged downstream of the motor, wherein both the pre-motor filter and the post-motor filter are cylindrical filters.

3. (Amended) A vacuum cleaner as claimed in claim 1 [or 2], wherein the pre-motor filter and the post-motor filter are each housed in a transparent casing.

8. (Amended) A vacuum cleaner comprising [an airflow path having] a dirty air inlet and a clean air outlet, a fan for drawing an airflow along the airflow path from the dirty air inlet to the clean air outlet, a motor for driving the fan, separating apparatus for separating dirt and dust from the airflow, a pre-motor filter arranged upstream of the motor and a post-motor filter arranged downstream of the motor, wherein the post-motor filter is housed in a casing containing a plurality of slots or apertures, the slots or apertures forming the clean air outlet and being arranged such that, in use, the airflow is diffused as it leaves the clean air outlet.

11. (Amended) A vacuum cleaner as claimed in claim 8 [any one of claims 8 to 10], wherein the casing is transparent.

12. (Amended) A vacuum cleaner as claimed in claim 1 [any one of the preceding claims], wherein the airflow is arranged to pass across or around the motor to provide cooling.

13. (Amended) A vacuum cleaner as claimed in claim 1 [any one of the preceding claims], wherein the separating apparatus comprises [comprise] at least one cyclone.

14. (Amended) A vacuum cleaner as claimed in claim 13, wherein the separating apparatus comprises [comprise] two concentric cyclones.

15. (Amended) A vacuum cleaner as claimed in claim 1 [any one of the preceding claims], wherein the pre-motor filter and the post-motor filter are substantially the same size.

16. (Amended) A vacuum cleaner as claimed in claim 15, wherein the pre-motor filter and the post-motor filter have substantially the same characteristics.

Please add the following new claims:

--18 A vacuum cleaner as claimed in claim 8, wherein the airflow is arranged to pass across or around the motor to provide cooling.

19. A vacuum cleaner as claims in claim 8, wherein the separating apparatus comprises at least one cyclone.

20. A vacuum cleaner as claimed in claim 19, wherein the separating apparatus comprises two concentric cyclones.

21. A vacuum cleaner as claimed in claim 8, wherein the pre-motor filter and the post-motor filter are substantially the same size.

22. A vacuum cleaner as claimed in claim 21, wherein the pre-motor filter and the post-motor filter have substantially the same characteristics.--

### REMARKS


The above amendments have been made to place the claims in standard U.S. format. In addition, claim 17 has been cancelled and claims 18-22 have been added.

In the event that the transmittal letter is separated from this document and the Patent and Trademark Office determines that an extension and/or other relief is required, applicant petitions for any required relief including extensions of time and authorizes the Assistant Commissioner to charge the cost of such petitions and/or other fees due in connection with the filing of this document to Deposit Account No. 03-1952. However, the Assistant Commissioner is not authorized to charge the cost of the issue fee to the Deposit Account.

Dated: June 16, 2000

Respectfully submitted,

By:

  
Richard D. Jordan  
Reg. No. 43,148

Morrison & Foerster LLP  
2000 Pennsylvania Avenue, N.W.  
Washington, D.C. 20006-1888  
Telephone: (202) 887-6924  
Facsimile: (202) 887-0763



--Abstract of the Invention

The invention provides a vacuum cleaner comprising an airflow path having a dirty air inlet (14) and a clean air outlet (44e), a fan (48) for drawing an airflow along the airflow path from the dirty air inlet (14) to the clean air outlet (44e), a motor (50) for driving the fan (48), separating apparatus (18) for separating dirt and dust from the airflow, a pre-motor filter (32) arranged upstream of the motor (50) and a post-motor filter (42) arranged downstream of the motor (50), wherein both the pre-motor filter (32) and the post-motor filter (42) are cylindrical filters. The invention further provides a vacuum cleaner comprising an airflow path having a dirty air inlet (14) and a clean air outlet (44e), a fan (48) for drawing an airflow along the airflow path from the dirty air inlet (14) to the clean air outlet (44e), a motor (48) for driving the fan (50), separating apparatus (18) for separating dirt and dust from the airflow, a pre-motor filter (32) arranged upstream of the motor (50) and a post-motor filter (42) arranged downstream of the motor (50), wherein the post-motor filter (42) is housed in a casing (44) containing a plurality of slots or apertures (44e), the slots or apertures (44e) forming the clean air outlet and being arranged such that, in use, the airflow is diffused as it leaves the clean air outlet.--

A Vacuum Cleaner

The invention relates to a vacuum cleaner.

In general, a vacuum cleaner incorporates a dirty air inlet, separating apparatus for separating dirt and dust from an airflow, a fan and motor for drawing an airflow into the separating apparatus via the dirty air inlet, and an outlet for expelling clean air into the atmosphere. Very often, a pre-motor filter is arranged in the airflow path upstream of the motor to prevent any dust or debris remaining entrained within the airflow from entering the motor. This reduces the risk of the motor becoming damaged or worn as a result of dirt or dust passing therethrough and also prevents such dirt or dust from being expelled into the atmosphere. It is also quite common for a post-motor filter to be arranged downstream of the motor to prevent any carbon particles dislodged within the motor, for example from the brushes within the motor, from being expelled into the atmosphere with the airflow. These pre- and post-motor filters are normally simple filters or pleated filters which are positioned such that they are relatively easily accessible whilst being unobtrusive during normal use of the vacuum cleaner. Known vacuum cleaners house the pre- and post-motor filters in cassettes slidably receivable in slots or sockets in the motor casing or within the main casing so that they become visible when the cleaner is opened to allow the separating apparatus to be emptied.

A disadvantage of the existing pre- and post-motor filters is that they are often relatively small in size, which means that the available filtering surface is relatively small. The filters can therefore become clogged over a period of time, despite the small amount of dust and debris they collect, which can affect the performance of the vacuum cleaner. They therefore require to be cleaned or changed more often than is desirable and this leads to increased costs and/or customer dissatisfaction. A further disadvantage is that, because the filters are generally hidden during normal operation of the vacuum cleaner, the user of the vacuum cleaner is often unaware that the pre- or post-motor filter may require changing which frustrates the user of the vacuum cleaner.

Another disadvantage of known vacuum cleaners relates to the cleaner outlet. Very often, the clean air is expelled to the atmosphere in the form of a stream of air. In some cases the expelled air is directed in front of the cleaner which can disturb debris which the user intended to pick up with the cleaner. Streams of expelled air can also cause difficulties such as extinguishing pilot lights on gas fires or disturbing curtains, other furnishing or papers lying near the vacuum cleaner. The more powerful the motor of the cleaner, the more likely the expelled air is to cause a disturbance.

It is an object of the present invention to provide a vacuum cleaner having pre- and post-motor filters which do not require to be cleaned or replaced as frequently as known cleaners. It is a further object to provide a vacuum cleaner having pre- and post-motor filters, in which the fact that one or both of the filters requires cleaning or replacement is more readily apparent to a use of the vacuum cleaner than is currently the case. A still further object of the invention is to provide a vacuum cleaner in which the stream of air exiting the clean air outlet is less likely to cause difficulties than in known vacuum cleaners.

The invention provides a vacuum cleaner as claimed in claim 1. Utilising cylindrical filters exposes a significantly larger filtration surface area to the airflow which extends the useful life of each filter. The preferable co-axial arrangement of the filters with the airflow passing through the centre of the post-motor filter allows the filters to be conveniently located adjacent one another so that they can be accessed easily, should cleaning or replacement be required.

The invention also provides a vacuum cleaner as claimed in claim 8. The diffusion of the air as it exits the outlet reduces the intensity of the exiting airstream which avoids the problems mentioned above and reduces customer dissatisfaction.

An embodiment of the invention will now be described with reference to the accompanying drawings, wherein:

Figures 1a and 1b are side and front views respectively of a vacuum cleaner according to the invention;

Figures 2a and 2b are isometric views of the pre-motor filter and the pre-motor filter housing respectively, each forming part of the vacuum cleaner of Figures 1a and 1b;

Figures 3a and 3b are isometric views of the post-motor filter and the post-motor filter housing respectively, each forming part of the vacuum cleaner of Figures 1a and 1b; and

Figure 4 is a sectional side view of the filters of Figures 2 and 3 illustrated in coaxial arrangement as in use.

A vacuum cleaner according to the invention is illustrated in Figures 1a and 1b. As can readily be seen, the vacuum cleaner 10 is an upright cleaner having a cleaner head 12 which incorporates a dirty air inlet 14. A central support member 16 supports dust separating apparatus 18 on one side thereof and a filter arrangement 20 on the other side thereof. An upwardly extending handle 22 is positioned rearwardly of the central support member 16 and is optionally releasable in the manner of a wand if the vacuum cleaner 10 is to be used in the cylinder mode. The upwardly extending handle 22 incorporates a hand grip 24 and other features which do not form part of the present invention. The cleaner head 12 is pivotably attached to a motor casing 26 to which support wheels 28 are attached and inside which a motor is located. In use, the motor draws dirty air into the vacuum cleaner 10 via the dirty air inlet 14 or alternatively via the wand 22. The air then passes through the dirt and dust separating apparatus 18 and through the filter assembly 20 before being expelled to the atmosphere.

The dirt and dust separating apparatus 18 does not form part of the present invention. The separating apparatus 18 can take the form of a bag or other separating means, e.g. cyclonic separating apparatus. In the example shown, it is envisaged that the dirt and dust separating apparatus 18 will take the form of two concentric cyclones designed to remove dirt and dust particles from the airflow. The airflow is fed to the dirt and dust separating apparatus 18 via conduits housed within the central support member 16.

Once the airflow has passed through the dirt and dust separating apparatus 18, it is then transferred, via a conduit housed within the central support member 16, to the

filter assembly 20. The filter assembly 20 is located on the side of the central support member 16 remote from the dirt and dust separating apparatus 18.

It is envisaged that the general shape of the filter assembly 20 will be similar to that of the dirt and dust separating apparatus 18. For example, in the embodiment shown, the dirt and dust separating apparatus 18 will be generally cylindrical in shape and the filter assembly 20 will therefore also be cylindrical in shape with substantially the same diameter as that of the dirt and dust separating apparatus 18.

The filter assembly 20 consists of a pre-motor filter assembly 30 and a post-motor filter assembly 40. The pre-motor filter assembly 30 is illustrated in Figures 2a and 2b and the post-motor filter assembly 40 is illustrated in Figures 3a and 3b. Each assembly 30,40 consists of a cylindrical filter 32,42 located within a housing 34,44. In each cylindrical filter 32,42, the filtration material is pleated and formed into a cylindrical shape with caps 32a,32a',42a,42a' located at either end to maintain the shape of the filter. The pleating of each filter, the support mesh 32b,42b and the fitting of the filtration material into the end caps 32a,32a',42a,42a' are all standard and known in the art. These details will not be described any further here.

Each housing 34,44 is designed and arranged to hold the respective filter 32,42. Each housing 34,44 is also designed and arranged so as to direct the airflow entering the filter assembly 20 along the correct airflow path. The pre-motor filter housing 34 has a generally cylindrical outer wall 34a whose diameter is approximately 10mm larger than the external diameter of the pre-motor filter 32. This allows an annular chamber 34b to be formed between the outer surface of the pre-motor filter 32 and the cylindrical outer wall 34a of the housing 34. The upper end of the outer wall 34a is open to allow the pre-motor filter 32 to be dropped into the housing 34 with ease. A collar 34c extending outwardly from the upper end cap 32a centralises the filter 32 when dropped into the housing 34. A loop-shaped tab 32d is fixed to the upper end cap 32a to allow the filter 32 to be easily removed from the housing 34 when required. A similar collar 42c and tab 42d are fixed to the upper end cap 42a of the post-motor filter 42 for the same reason.

At the lower end of the pre-motor housing 34 is an annular base 34d having a cylindrical opening in the centre thereof. Upstanding from the annular base 34d are a

plurality of upstanding webs 34e on which the lower end of the pre-motor filter 32 is supported. Radial channels are formed between the upstanding webs 34e along which the airflow can pass. A ridge or groove 34f is formed in the annular base 34d around the periphery thereof to receive the post-motor filter housing 44.

The lower end of the pre-motor filter 32 is closed by means of the cap 32a' extending across the central aperture of the cylindrical filter 32. In this way, air is prevented from passing down the centre of the pre-motor filter 32 beyond the end cap 32a'.

The post-motor filter housing 44 also consists generally of an outer cylindrical wall 44a. The diameter of the outer cylindrical wall 44a is approximately 10mm greater than the outer diameter of the post-motor filter 42. This allows an annular chamber 44c to be created therebetween. A plurality of slots 44e are provided in the outer wall 44a and extend around substantially all of the circumference thereof. Bosses 44f are provided on the base of the post-motor filter housing 44 for receiving screws (not shown).

An inner cylindrical wall 44b forming part of the motor casing of the vacuum cleaner extends upwardly through the centre of the cylindrical post-motor filter 42. The upper lip of the inner cylindrical wall 44b is dimensioned and arranged so as to abut against the inner circumference of the annular base 34d of the pre-motor filter housing 34. Sealing means 45 are provided between the upper lip and the annular base 34d. The lower end of the inner cylindrical wall 44b is integral with a conduit 46 arranged in the motor casing 26 which leads the airflow through the fan 48 and past the motor 50 before returning it to the post-motor filter 42.

The diameter of the inner cylindrical wall 44b is approximately 15mm less than the inner diameter of the post-motor filter 42 so that a second annular chamber 44d is created therebetween. The second annular chamber 44d communicates with the conduit 46 downstream of the fan 48 and the motor 50. This portion of the conduit 46 is essentially the exhaust side of the motor housing.

The filter assembly 20 operates in the following manner. The airflow enters the pre-motor filter assembly 30 via a conduit 31 which communicates with the interior of the pre-motor filter 32. There being no axial escape route due to the cap 32a at the

bottom of the filter 32 extending across the interior of the filter 32, the airflow is forced to pass through the filter 32 in an outwardly radial direction. The airflow then enters the annular chamber 34b and passes downwardly to the conduits arranged between the upwardly extending webs 34e. The airflow passes radially inwardly between the webs 34e and then passes axially down inside the inner cylindrical wall 44b within the post-motor filter housing 44. The airflow thus by-passes the post-motor filter 42 until it has passed along the conduit 46 leading to the fan 48 and the motor 50. The airflow passes through the fan 48, around the motor 50, thus having a cooling effect, and then back into the second annular chamber 44d located between the post-motor filter 42 and the inner cylindrical wall 44b. Because the upper end of the post-motor filter 42 is sealed to the top of the inner cylindrical wall 44b, the airflow is forced to pass through the post-motor filter 42. It then passes through the annular chamber 44c and exits the post-motor filter housing 44 via the slots 44e into the atmosphere.

The conduit 46 and inner cylindrical wall 44b form part of the motor casing 26 of the vacuum cleaner 10 or may take the form of separate parts fixed to or located within the motor casing. The fan 48 and the motor 50 are also permanently housed within the motor casing 26. However, the pre-motor filter 32, the post-motor filter 42 and the pre-motor filter housing 34 are all removable from the vacuum cleaner 10. The post-motor filter housing 44 is permanently fixed by means of screws, preferably by passing the screws upwardly through bores in the motor casing and into the bosses 44f, into the position shown in Figure 1b. The post-motor filter 42 is made accessible by removing the pre-motor filter housing 34 from the vacuum cleaner 10. The post-motor filter 42 can then be removed from the fixed post-motor filter housing 44 via its open upper end.

At the upper end of the filter assembly 20, a releasable fastening device must be employed. Any appropriate releasable fastening means will suffice; for example, a snap-fit arrangement or releasable clip. The arrangement illustrated in Figure 4 consists of a rotatable collar 52 which, in its operational position, is biased into a downward position. A depending tube 54 having cylindrical walls makes a seal with the inner circumference of the end cap 32a of the pre-motor filter 32 so as to ensure that an airflow entering the filter assembly 20 is directed into the interior of the pre-motor filter

32, and also with the upper lip of the outer cylindrical wall 34a of the pre-motor filter housing 34. The tube 54 centralises and maintains the pre-motor filter 32 and the pre-motor filter housing 34 in the appropriate position. The ridge or groove 34f at the lower end of the cylindrical wall 34a maintains the desired relative positions of the pre-motor filter housing 34 and the post-motor filter housing 44.

The collar 52 is designed so as to be rotatable with respect to the body of the vacuum cleaner and also with respect to the pre-motor filter housing 34. Cam surfaces (not shown) are provided such that, when the collar 52 is rotated, it is lifted with respect to the pre-motor filter housing 34 so that the tube 54 depending from the collar 52 is raised clear of the filter 32 and the housing 34. Biasing means (not shown) are provided in order to bias the collar 52 into its downward position in order to avoid inadvertent raising of the collar 52. The biasing means can take the form of a stop detail in the profile of the cam surfaces, resilient plastic strips, deformable foam materials, torsion springs etc.

In order to remove the filter assembly 20 from the vacuum cleaner 10, the collar 52 is rotated against the action of the biasing means. The cylindrical walls of the tube 54 depending from the collar 52 are raised clear of the filter 32 and the cylindrical wall 34a of the housing 34. This allows the housing 34 to be lifted slightly and removed from the post-motor filter housing 44. As soon as the pre-motor filter housing 34 has been removed, the post-motor filter 42 can be removed from the post-motor filter housing 44 merely by lifting it from the housing 34. The pre-motor filter 32 can also be lifted or tipped out of its housing 34. Removing either or both housings 34,44 means that either or both filters 32,42 can be removed or replaced as desired.

The housings 34, 44 are moulded from transparent plastics materials. The transparency of the cylindrical walls 34a,44a of the housings 34,44 allows a user of the vacuum cleaner 10 to inspect the filters 32,42 for signs of clogging. There is no requirement that the pre-motor filter 32 and post-motor filter 42 be inspected only when the dust separating apparatus 18 are accessed for emptying purposes. The filters 32,42 are visible to the user at all times and the user can therefore readily determine whether or not either or both filters 32,42 require replacement. Because both the pre-motor



filter 32 and the post-motor filter 42 are cylindrical filters having large filtration surface areas, it is envisaged that neither filter 32,42 will require replacement very often.

The slots 44e located in the post-motor filter housing 44 extend around substantially all of the circumference of the housing 44. The substantial area through which the airflow is expelled from the vacuum cleaner 10 means that the strength of the exiting airflow is not high. Furthermore, because the slots are arranged on a curved surface, in this case a cylindrical surface, the airflow is diffused as it leaves the vacuum cleaner. The strength of the airflow is thereby considerably reduced and therefore the problems previously associated with concentrated airflows are avoided.

As a further example, the following dimensions are given in order to further enable a skilled reader to put the invention into practice.

External diameter of filters 32,42	10cm
Internal diameter of filters 32,42	5.2cm
Length of filters 32,42	14cm
Internal diameter of outer cylindrical walls 34a,44a	11cm
External diameter of inner cylindrical wall 44b	3.7cm

The scope of the invention is not limited to the precise details of the embodiment described above. Modifications and variations will be apparent to a reader skilled in the art. For example, the post-motor filter housing can be made releasable from the motor casing if desired.

## CLAIMS

1. A vacuum cleaner comprising an airflow path having a dirty air inlet and a clean air outlet, a fan for drawing an airflow along the airflow path from the dirty air inlet to the clean air outlet, a motor for driving the fan, separating apparatus for separating dirt and dust from the airflow, a pre-motor filter arranged upstream of the motor and a post-motor filter arranged downstream of the motor, wherein both the pre-motor filter and the post-motor filter are cylindrical filters
2. A vacuum cleaner as claimed in claim 1, wherein the airflow is arranged to flow radially outwardly through each of the filters when the vacuum cleaner is in use.
3. A vacuum cleaner as claimed in claim 1 or 2, wherein the pre-motor filter and the post-motor filter are each housed in a transparent casing.
4. A vacuum cleaner as claimed in claim 3, wherein the pre-motor filter and the post motor filter are housed in separate transparent casings.
5. A vacuum cleaner as claimed in claim 4, wherein the cylindrical filters are arranged coaxially and adjacent one another, the airflow path passing through the centre of the post-motor filter between the pre-motor filter and the motor.
6. A vacuum cleaner as claimed in claim 5, wherein the cylindrical filters are positioned generally upright and parallel to the separating apparatus, the upper end of the uppermost casing being held in place by means of a retractable collar.
7. A vacuum cleaner as claimed in claim 6, wherein the collar is biased into a non-retracted position in which the uppermost casing is retained in place.
8. A vacuum cleaner comprising an airflow path having a dirty air inlet and a clean air outlet, a fan for drawing an airflow along the airflow path from the dirty air inlet to

the clean air outlet, a motor for driving the fan, separating apparatus for separating dirt and dust from the airflow, a pre-motor filter arranged upstream of the motor and a post-motor filter arranged downstream of the motor, wherein the post-motor filter is housed in a casing containing a plurality of slots or apertures, the slots or apertures forming the clean air outlet and being arranged such that, in use, the airflow is diffused as it leaves the clean air outlet.

9. A vacuum cleaner as claimed in claim 8, wherein the casing is cylindrical and the slots or apertures extend around at least part of the circumference thereof.
10. A vacuum cleaner as claimed in claim 9, wherein the slots or apertures extend around at least half of the circumference of the casing.
11. A vacuum cleaner as claimed in any one of claims 8 to 10, wherein the casing is transparent.
12. A vacuum cleaner as claimed in any one of the preceding claims, wherein the airflow is arranged to pass across or around the motor to provide cooling.
13. A vacuum cleaner as claimed in any one of the preceding claims, wherein the separating apparatus comprise at least one cyclone.
14. A vacuum cleaner as claimed in claim 13, wherein the separating apparatus comprise two concentric cyclones.
15. A vacuum cleaner as claimed in any one of the preceding claims, wherein the pre-motor filter and the post-motor filter are substantially the same size.
16. A vacuum cleaner as claimed in claim 15, wherein the pre-motor filter and the post-motor filter have substantially the same characteristics.

17. A vacuum cleaner substantially as hereinbefore described with reference to the accompanying drawings.

1/4

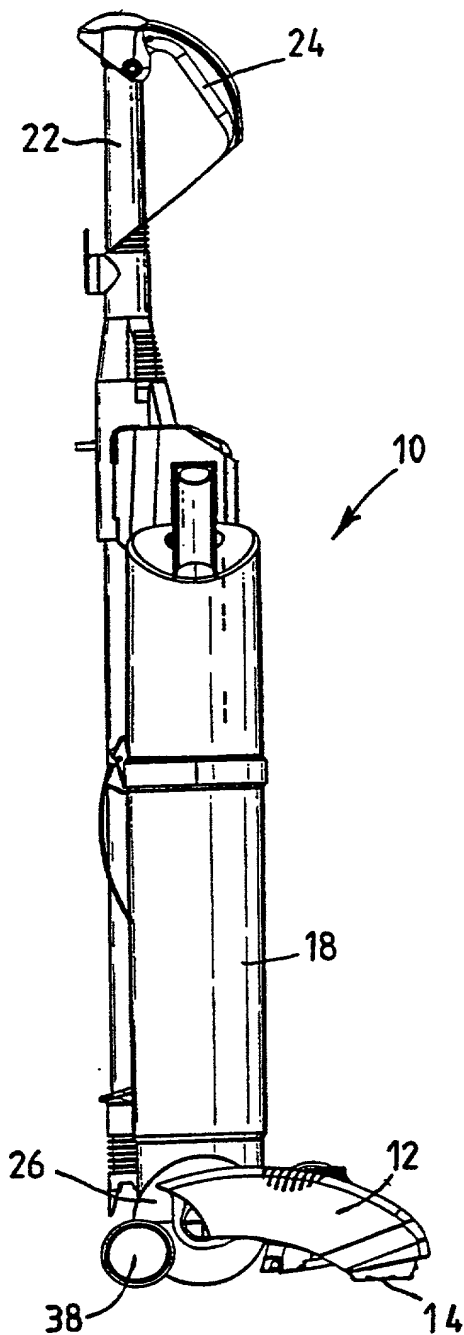


Fig. 1a





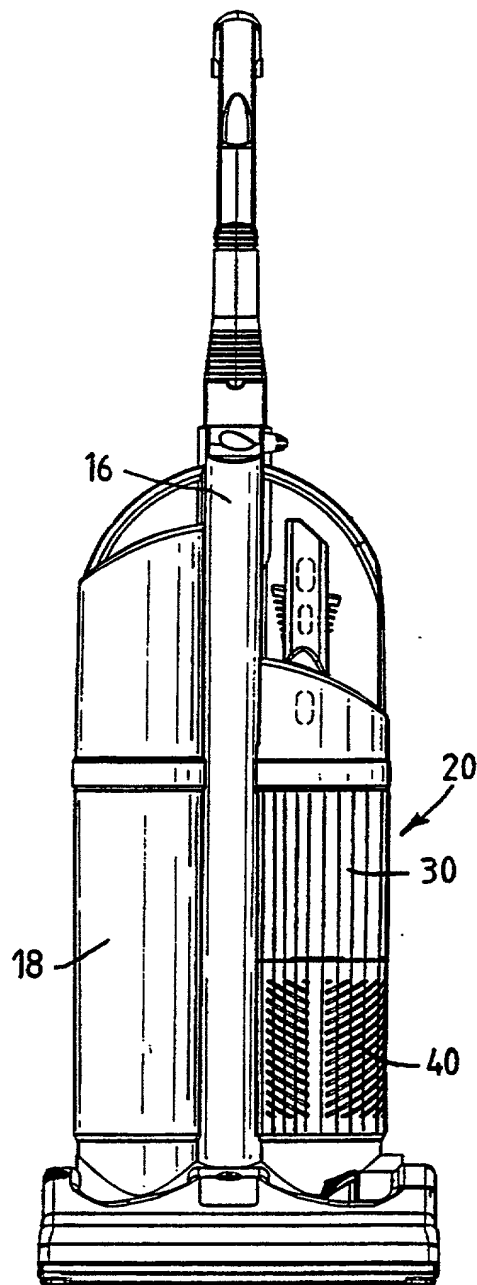


Fig. 1b


2/4

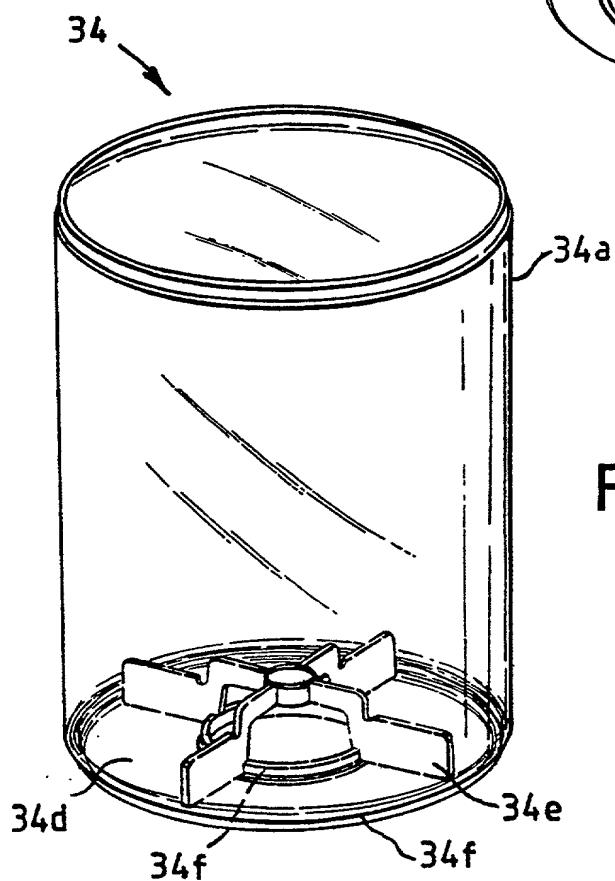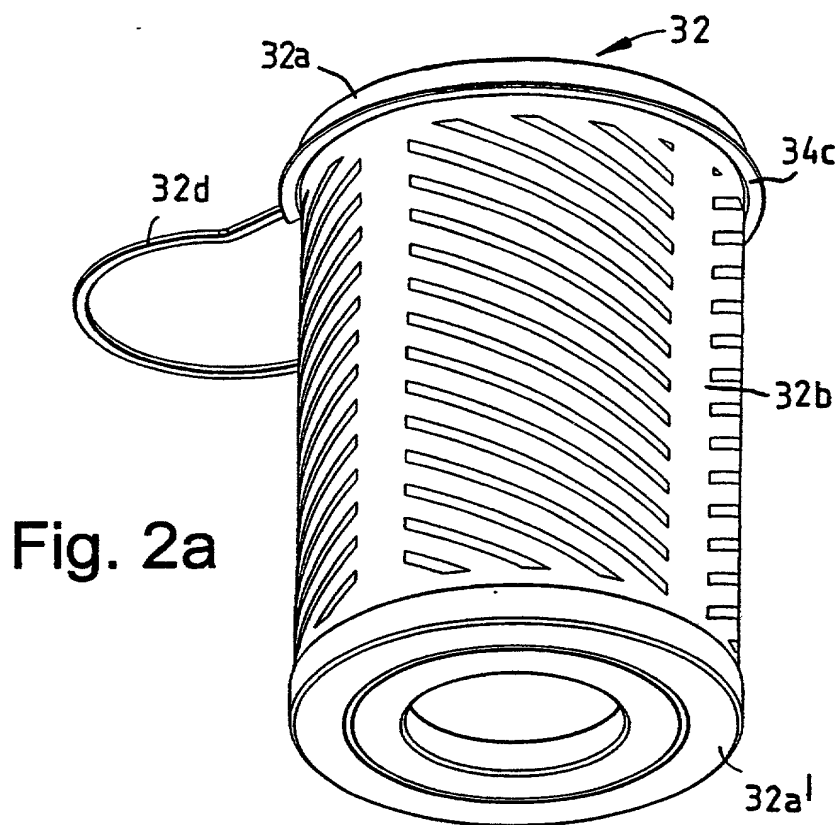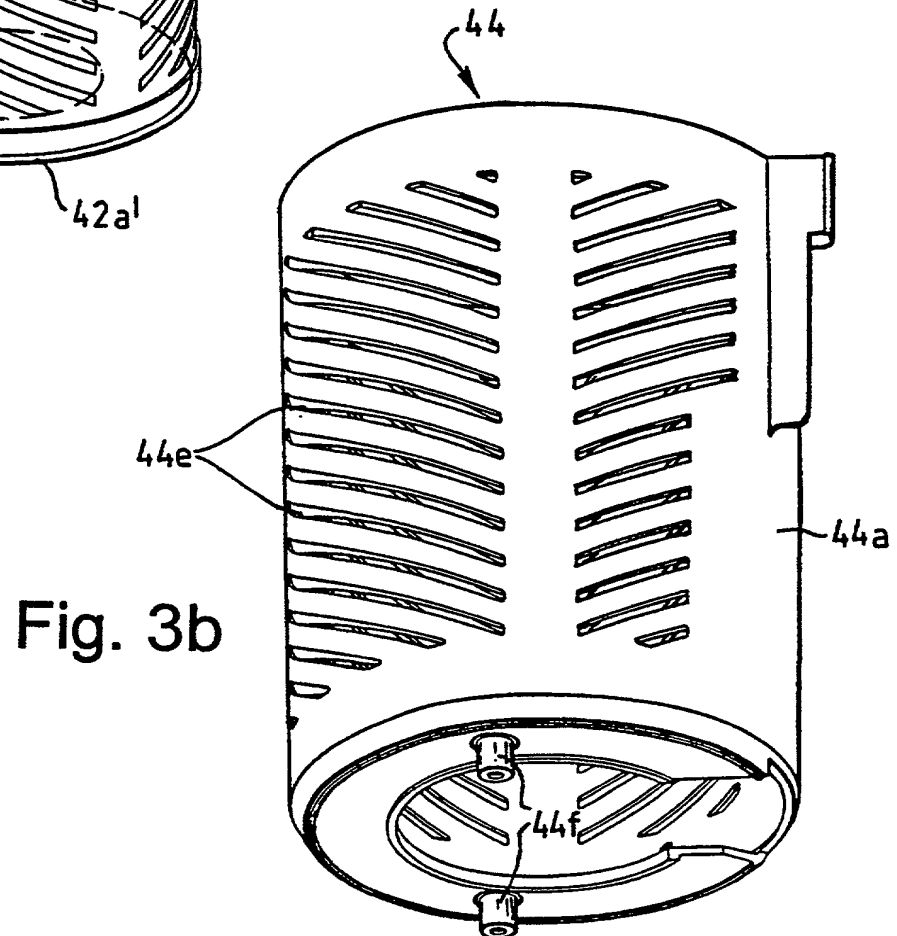

3/4

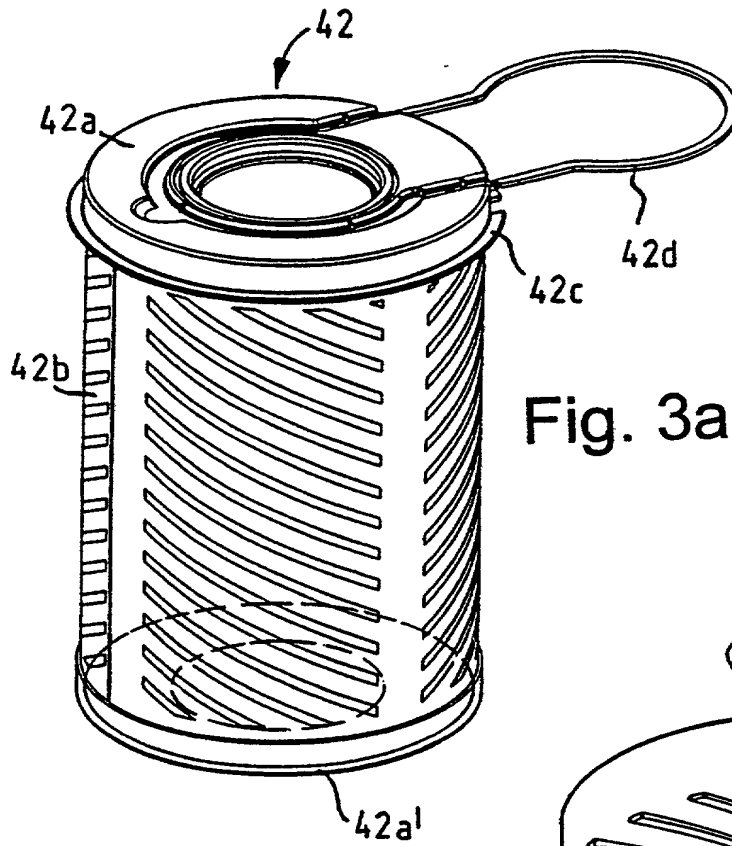

4/4

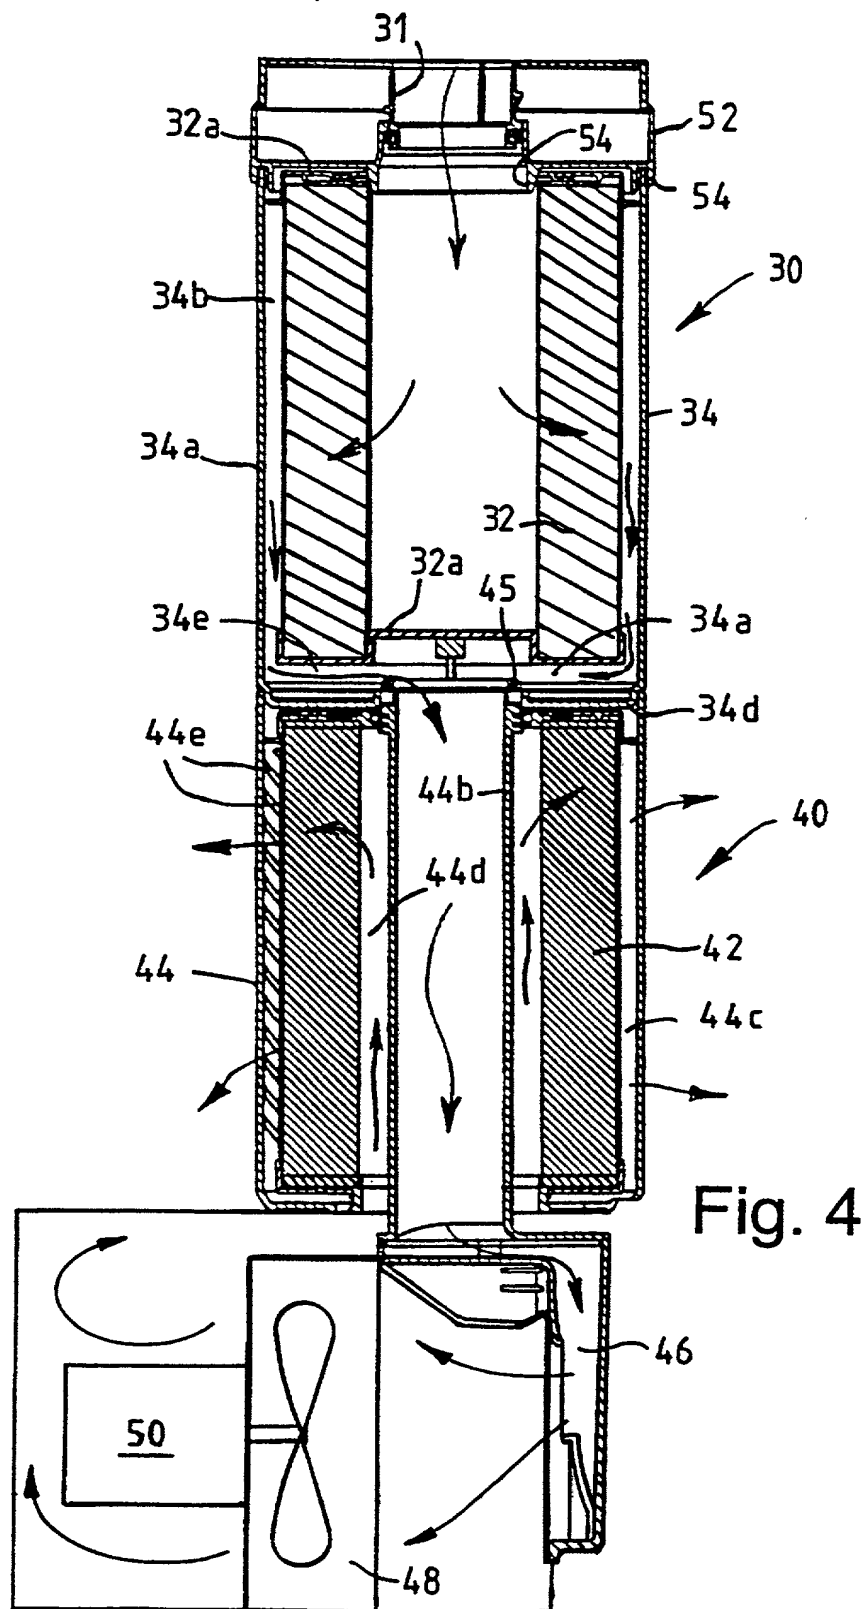



PATENT  
Docket No. \*  
424662001700  
Client Ref. USP0050

### DECLARATION FOR UTILITY PATENT APPLICATION

AS A BELOW-NAMED INVENTOR, I HEREBY DECLARE THAT:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled: A VACUUM CLEANER, the specification of which is attached hereto unless the following box is checked:

☒ was filed on June 16, 2000 as United States Application Serial No. 09/581,765 or PCT International Application No.

I HEREBY STATE THAT I HAVE REVIEWED AND UNDERSTAND THE CONTENTS OF THE ABOVE-IDENTIFIED SPECIFICATION, INCLUDING THE CLAIMS, AS AMENDED BY ANY AMENDMENT REFERRED TO ABOVE.

I acknowledge the duty to disclose information which is material to the patentability as defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

Application No.	Country	Date of Filing (day/month/year)	Priority Claimed?
97 26676.1	Great Britain	17/12/1997	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

I hereby claim benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

Application Serial No.	Filing Date
*	

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

Application Serial No.	Filing Date	Status
PCT/GB98/03816	17/12/98	<input type="checkbox"/> Patented <input checked="" type="checkbox"/> Pending <input type="checkbox"/> Abandoned

I hereby appoint the following attorneys and agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Laurie A Axford (Reg No. <u>35,053</u> )	Sanjay S Bagade (Reg No. <u>42,280</u> )
Joseph Barrera (Reg No. <u>44,522</u> )	Erwin J Basinski (Reg No. <u>34,773</u> )
Shantanu Basu (Reg No. <u>43,318</u> )	Richard R Batt (Reg No. <u>43,485</u> )
Frank P Becking (Reg No. <u>42,309</u> )	Vincent J Belusko (Reg No. <u>30,820</u> )
Kimberly A Bolin (Reg No. <u>44,546</u> )	Timothy J Bortree (Reg No. <u>43,506</u> )
Barry E Bretschneider (Reg No. <u>28,055</u> )	Tyler S Brown (Reg No. <u>36,465</u> )
Nicholas Buffinger (Reg No. <u>39,124</u> )	Jingming Cai (Reg No. <u>P-44,579</u> )
Mark R Carter (Reg No. <u>39,131</u> )	Robert K Cerpa (Reg No. <u>39,933</u> )
Peng Chen (Reg No. <u>43,543</u> )	Thomas Chuang (Reg No. <u>P-44,616</u> )
Thomas E Ciotti (Reg No. <u>21,013</u> )	Matthew M D'Amore (Reg No. <u>42,457</u> )
Raj S Davé (Reg No. <u>42,465</u> )	Stephen C Durant (Reg No. <u>31,506</u> )
Carolyn A Favorito (Reg No. <u>39,183</u> )	David L Fehrman (Reg No. <u>28,600</u> )
Hector Gallegos (Reg No. <u>40,614</u> )	Debra J Glaister (Reg No. <u>33,888</u> )
Kenneth R Glick (Reg No. <u>28,612</u> )	Franklin Y Han (Reg No. <u>41,055</u> )
Charles D Holland (Reg No. <u>35,196</u> )	Peter Hsieh (Reg No. <u>P-44,780</u> )
Madeline I Johnston (Reg No. <u>36,174</u> )	Richard D Jordan (Reg No. <u>33,519</u> )
Ararat Kapouytian (Reg No. <u>40,044</u> )	Richard C Kim (Reg No. <u>40,046</u> )
Kawai Lau (Reg No. <u>44,461</u> )	Elaine K Lee (Reg No. <u>41,936</u> )
Richard H Lilley (Reg No. <u>42,803</u> )	Lisa E Marks (Reg No. <u>44,901</u> )
Thomas D Mays (Reg No. <u>34,524</u> )	Gladys H Monroy (Reg No. <u>32,430</u> )
Philip A Morin (Reg No. <u>P-45,926</u> )	Kate H Murashige (Reg No. <u>29,959</u> )
Catherine M Polizzi (Reg No. <u>40,130</u> )	William C Revelos (Reg No. <u>42,101</u> )
Paul J Riley (Reg No. <u>38,596</u> )	Robert Saltzberg (Reg No. <u>36,910</u> )
Debra A Shetka (Reg No. <u>33,309</u> )	Terri Shieh-Newton (Reg No. <u>P-47,081</u> )
Rebecca Shortle (Reg No. <u>P-47,083</u> )	Kevin R Spivak (Reg No. <u>43,148</u> )
E Thomas Wheelock (Reg No. <u>28,825</u> )	Todd W Wight (Reg No. <u>45,218</u> )
Thomas G Wiseman (Reg No. <u>35,046</u> )	Frank Wu (Reg No. <u>41,386</u> )
George C Yu (Reg No. <u>44,418</u> )	Karen R Zachow (Reg No. <u>P-46,332</u> )


and:

Please direct all communications to:

Richard D Jordan  
Morrison & Foerster LLP  
2000 Pennsylvania Avenue, N.W.  
Washington, D.C. 20006-1888

Please direct all telephone calls to Richard D Jordan at (202) 887-6930.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under § 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

25072000x 

Date	1-6	Name:	James DYSON	
		Residence:	Wiltshire, GREAT BRITAIN	GBX
		Citizenship:	GREAT BRITAIN	
		Post Office Address:	Kingsmead Mill, Little Somerford, Wiltshire, SN15 5JN, GREAT BRITAIN	